

Derived G+1 Preliminary Plan Set

A coordinated planning package for a ground-floor Bar Association hall and first-floor Bar Library, derived from the stored L-shaped plot geometry and the room schedule in the repository.

PLOT GEOMETRY

L-shaped

98' west depth · 60' north · 35' south

SETBACKS USED

0' / 5'

West 0' · North/South/East 5'

DERIVED ENVELOPE

4,427.5 sf

Coordinate-based, per floor

Important area reconciliation: the brief carries 4,785 sq ft per floor, but the stored coordinates and simple setback envelope calculate 4,427.5 sq ft. This PDF uses 4,427.5 sq ft for the drawn plan. A licensed architect must verify the survey and true polygon offset before approval, procurement, or construction.

WHAT IS INCLUDED


- Site boundary and setback diagram
- Ground-floor hall, reception, stair, pantry, toilets, and dais plan
- First-floor library, stack, admin, discussion, computer, and service-core plan
- Area reconciliation, cost basis, and next-step review checklist

SOURCE AND STATUS

Source context: user-provided hand sketch and planning notes. The photograph shows an earlier smaller dimension set; later notes provide the rationalized 98'/60'/35' inputs. This is a preliminary planning study, not a construction, approval, fire-NOC, or structural drawing.

Plot and setback envelope

The plotted polygon follows the repository's rationalized coordinates. The green dashed outline is the simple coordinate-derived envelope used for the floor plans.

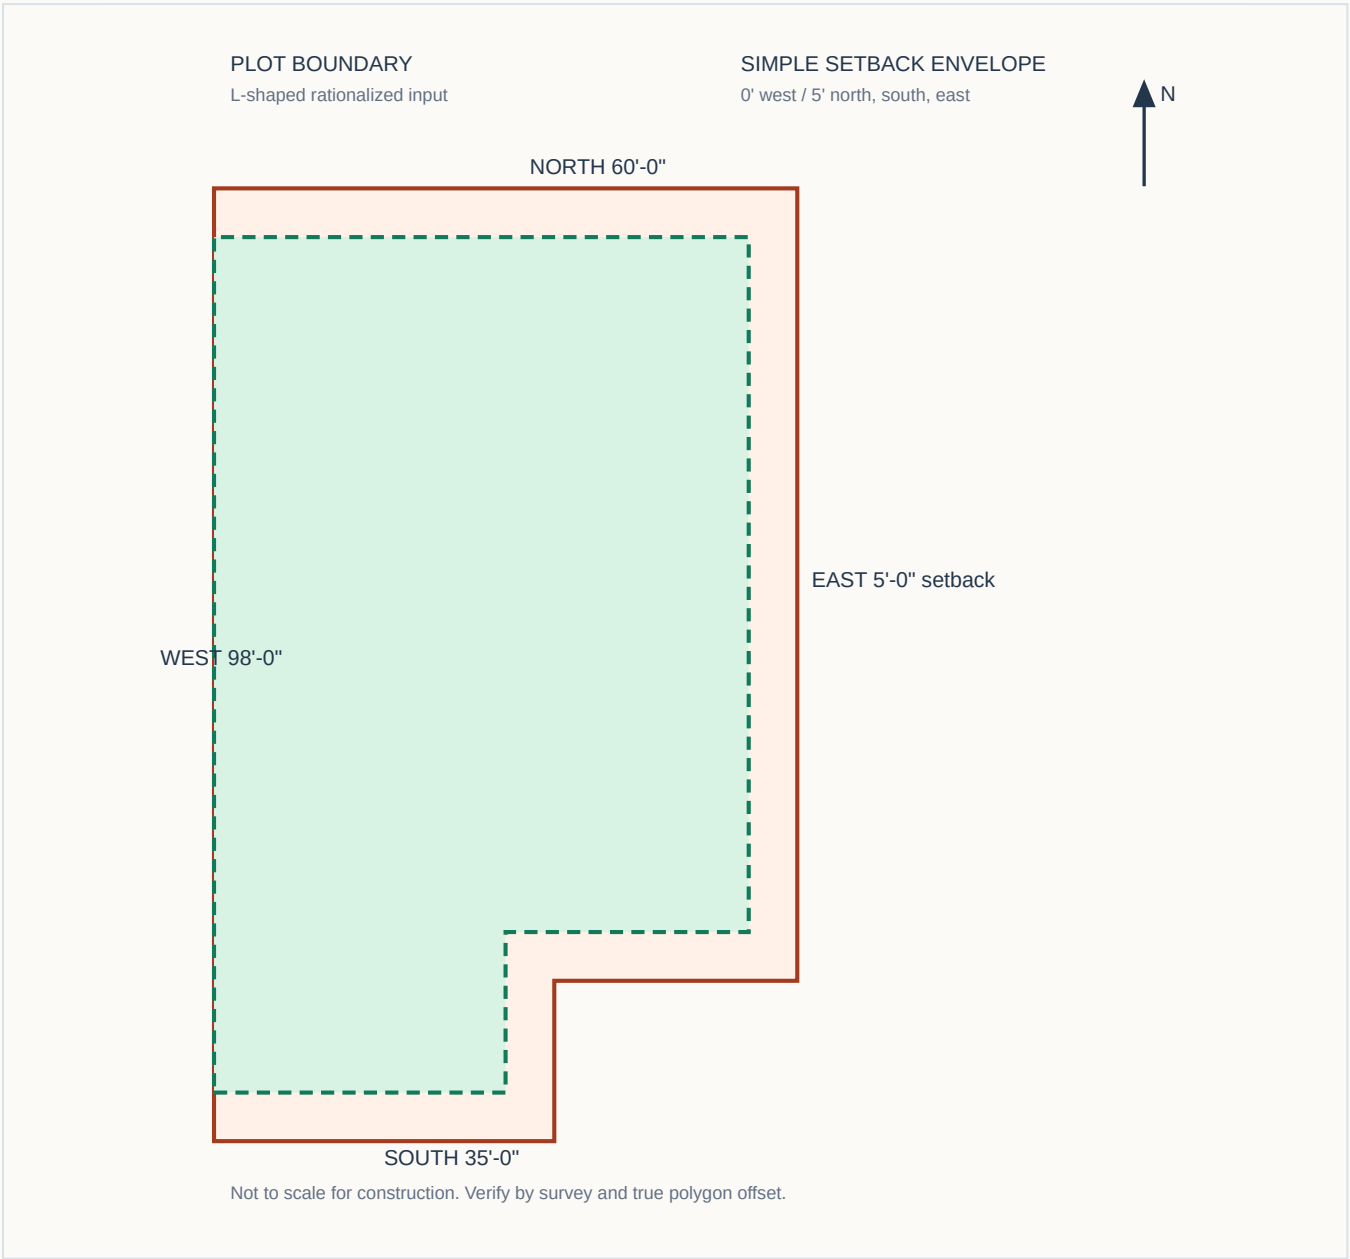

STORED DIMENSIONS


Edge / input	Value
North width	60'-0"
South width	35'-0"
West depth	98'-0"
East step	12'-0" + 16'-6"

AREA CHECK

Measure	Area
Polygon from coordinates	5,467.5 sf
Simple setback envelope	4,427.5 sf
Brief assumption	4,785.0 sf

Bar Association Hall

South entry and reception lead into the service core and the upper hall. The west zero-setback edge is shown as a blank wall; the east-side exit remains a review placeholder.

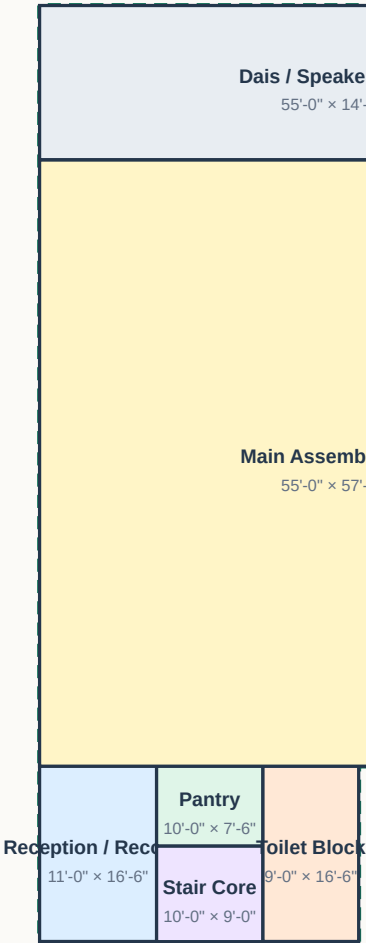


Green dashed line = simple coordinate-derived envelope; spaces are preliminary planning rectangles.

ID	Space	Nominal size	Area sf
GF-01	Reception / Records	11'-0" × 16'-6"	181.5
GF-02	Stair Core	10'-0" × 9'-0"	90.0
GF-03	Pantry	10'-0" × 7'-6"	75.0
GF-04	Toilet Block	9'-0" × 16'-6"	148.5
GF-05	Main Assembly Hall	55'-0" × 57'-0"	3,135.0
GF-06	Dais / Speaker Zone	55'-0" × 14'-6"	797.5

Bar Library + Pantry

The stair, pantry, and wet areas are stacked over the ground-floor service core. Reading and stack zones occupy the upper wing; shelving loads and escape capacity require engineering review.

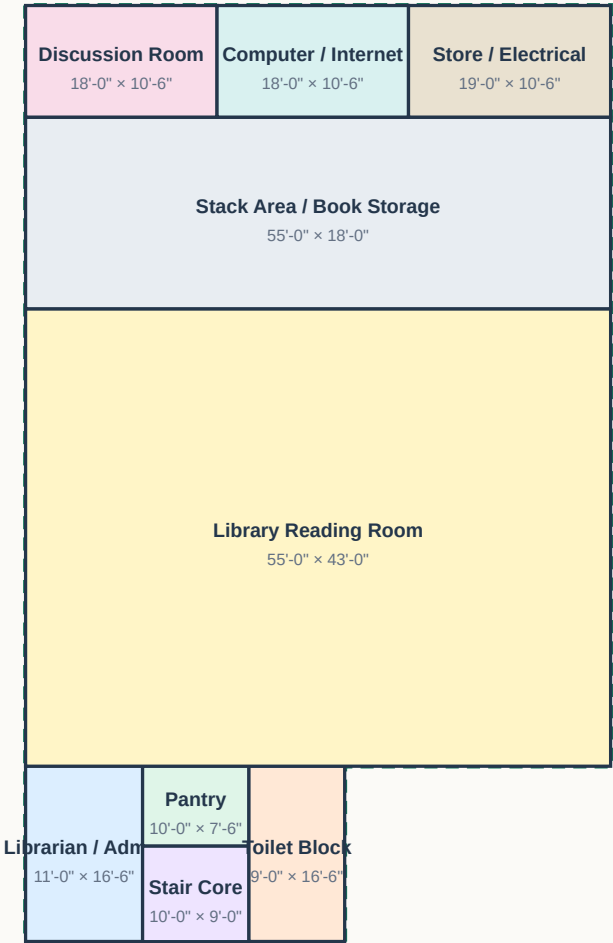

Green dashed line = simple coordinate-derived envelope; spaces are preliminary planning rectangles.

ID	Space	Nominal size	Area sf
FF-01	Librarian / Admin	11'-0" × 16'-6"	181.5
FF-02	Stair Core	10'-0" × 9'-0"	90.0
FF-03	Pantry	10'-0" × 7'-6"	75.0
FF-04	Toilet Block	9'-0" × 16'-6"	148.5
FF-05	Library Reading Room	55'-0" × 43'-0"	2,365.0
FF-06	Stack Area / Book Storage	55'-0" × 18'-0"	990.0
FF-07	Discussion Room	18'-0" × 10'-6"	189.0
FF-08	Computer / Internet	18'-0" × 10'-6"	189.0
FF-09	Store / Electrical	19'-0" × 10'-6"	199.5

Cost basis and review plan

Recommended next move: commission a site survey and ask the architect/engineer to resolve the area discrepancy before treating the room sizes or estimate as final.

PLANNING ESTIMATE CARRIED IN THE REPOSITORY

Item	Basis	Amount (₹)
Ground floor construction	4,785 sf × ₹1,850	88,52,250
First floor construction	4,785 sf × ₹1,850	88,52,250
Construction subtotal	9,570 sf × ₹1,850	1,77,04,500
Electrical centage + development	12% + 10% of subtotal	38,94,990
Special fixtures	Lump sum	10,00,000
QA + contingencies	1% + 1.5% of A+B	5,64,987
Prorata charges	13% of A+B+C	30,11,382
Rounded planning total	Not a tender value	₹2,61,75,859

TECHNICAL CHECKS

- Confirm zero-west setback legality, fire separation, waterproofing, scaffolding, and maintenance access.
- Confirm occupant load, stair width, exits, travel distance, accessible route, and toilet clearances.
- Coordinate structural grid, foundation, soil, shelving loads, and roof water tank.

REPOSITORY OUTPUTS

- `site_plan.json` and `preliminary_plans.json`
- Ground and first-floor SVG review drawings
- Cost, structural, MEP, amenities, and source notes
- This PDF plus the reproducible generator script

The ₹1,850/sq ft estimate intentionally retains the brief's 4,785 sq ft assumption. Reprice after the survey and coordinated design fix the final plinth area.